


Ventrix 550/51/52




Features

- Intel® 4th Generation Processor
- Supports iAMT v9.0
- Support for PCIe rev 3.0
- Road mapped industrial components
- Mission critical 24/7 applications
- Custom colours and OEM branding
- Assembled and tested within a lean environment under ISO-9001


Dimensions

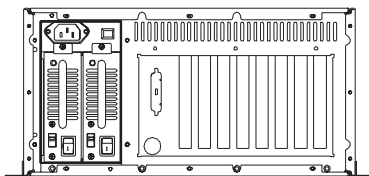


Rear View

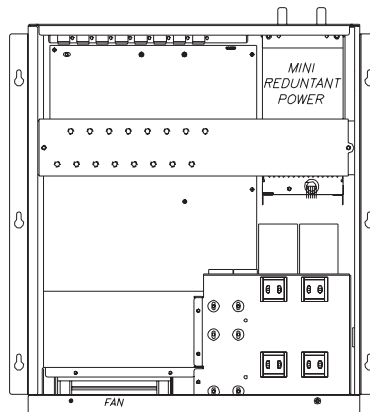

Top View

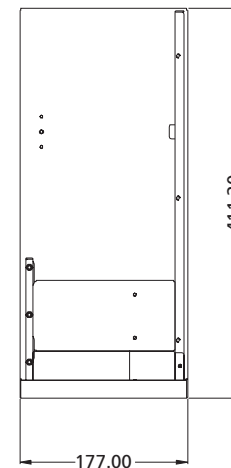

Side View

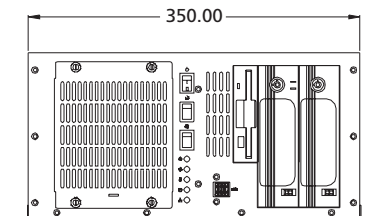

Front View

Sales: +44 (0) 1273 570 220 Admin: +44 (0) 1273 608 331 Fax: +44 (0) 1273 570 215 Website: www.amplicon.com Email: sales@amplicon.com

Ventrix 550/51/52

Specifications

The information is believed to be accurate. However Amplicon Liveline Limited accepts no responsibility for any problems caused by errors and omissions. Specifications are subject to change without notice.

Hardware specification	Processors incorporated into each model: Ventrix 550 – Intel® Core™ i3-4330 3.5 GHz, 3M Cache Ventrix 551 – Intel® Core™ i5-4570S 2.9 GHz, 6M Cache Ventrix 552 – Intel® Core™ i7-4770S 3.1 GHz, 8M Cache Chipset: Intel® Q87 Express Chipset Memory: 2GB DDR3 up to 1600MHz dual channel (max 16GB*) Video: Integrated Intel® HD Graphics Display Resolution: Resolutions up to 1920 x 1200 @ 60 Hz LAN: Dual GbE (I217LM, I211-AT) Watchdog Timer: 1-255 sec or 1-255 min *Usable memory capacity may be limited by the operating system	Environmental operational	Acoustic noise: 47dBA sound pressure at 23°C (typical) 49dBA* Temperature: 0 to 40°C (tested for operation up to 50°C) Humidity: 5 to 90% at 25°C non-condensing Low noise fan options are available (maximum operating temperature 35°C) We can design systems to meet additional requirements * Thermally controlled system fans run at peak operating speed during system start up. Speed is reduced based system temperature.	
	BIOS	AMI 2 x 32 Mbit flash memory	Environmental storage	Temperature: -20 to 65°C
Storage	500GB SATA HDD DVDRW (standard height) Total drive capacity: 2 x 5.25", 2 x 3.5" HDD We can provide storage and backup solutions for any application	System expansion	Electromagnetic compatibility (EMC)	EN55022 Class A EN55024 Industrial severity (where applicable) Electrostatic discharge immunity test (EN61000-4-2) ±4kV Contact, applied to enclosure port ±8kV Air, applied to enclosure port ±4kV Indirect, applied to coupling plane Radiated, radio-frequency, electromagnetic field immunity test (EN61000-4-3) 80-1000MHz, 10 V/m (RMS, no modulation) 80% Modulation with 1kHz Sine wave Electrical fast transient/burst immunity test (EN61000-4-4) Power port AC, inc. protective earth Severity ±2kV Surge Immunity test (EN61000-4-5) Power port AC Severity ±2kV applied line to line Severity ±2kV applied line to earth Immunity to conducted disturbances induced by radio frequency fields (EN61000-4-6) Power port AC, inc. protective earth via CDN M3 0.15-80MHz, 10 V/m (no modulation) 80% Modulation with 1kHz Sine wave, applied via CDN type M3 Voltage dips, short interrupts and voltages variations immunity tests (EN61000-4-11) Power port AC >95% Reduction, 0.5 Periods >30% Reduction, 25 Periods >95% Reduction, 250 Periods Voltage dips, short interrupts and voltages variations immunity tests (EN61000-4-11) Power port AC >30% Reduction, 0.5 Periods >60% Reduction, 25 Periods >100% Reduction, 250 Periods Limits for harmonic current measurement (EN 61000-3-2), Product Class D Limitation of voltage changes, voltage fluctuations and flicker (EN 61000-3-3) Amplicon own a fully equipped EMC facility and can provide many additional tests to meet your requirements.
Supported OS (Operating System)	Microsoft Desktop: Windows 7, 8 (x86 and x64) Microsoft Server: Server 2008 R2, Server 2012 Linux: Ubuntu 13.10 (x86 and x64) Other operating systems are available			
LEDs and switches	Power (PC ON) LED Hard disk access LED Front: ATX system control switch, system reset	External interfaces	Front USB: 2 ports Front keyboard: Mini-DIN for (keyboard only) Rear USB: 2 x USB 3.0 ports on faceplate Serial: COM 1-4* (9 pin D-Type) VGA: DB-15 connector x 1 LAN: RJ45 Ethernet x 2 *Please discuss your port configuration requirements	
Mechanical	Design: Desktop or wall mount Construction: Heavy duty cold rolled electroplated steel Colour: Black (custom colours available for large orders) Dimensions: 350(W) x 177(H) x 411(D) mm (13.8" x 7.0" x 16.2") Packaging size: 490(W) x 324(H) x 558(D) mm (19.3" x 12.8" x 22.0") Total drive capacity: 2 x 5.25", 1 x 3.5" HDD, 1 x 3.5" floppy disk drive Cooling: 1 x 120mm fan, 90 CFM Air filter: Removable (washable) Gross weight: Approximately 17kg	Safety	Safety of information technology equipment (EN 60950)	
		Electrical ratings	Voltage: 90 – 264 VAC full range Frequency: 47-63Hz Input current: 8.0 / 4.0A for 115 / 230 VAC Inrush current: 65A / 125A max Typical operational current: 0.5 –1A (base system) PSU maximum secondary loading: 460W Active PFC EMI noise filter Over power / voltage / current protection Short circuit protection	
		Reliability	Reliability System MTBF: >25,000 hrs @ 25°C Diagnostic burn-in run on every system Typical Power 150W (unexpanded)	

Model	PCIe slots	PCI slots	Processor
Ventrix 550-E1.6	1	6	Intel Core i3-4330, 3.5GHz
Ventrix 551-E1.6	1	6	Intel Core i5-4570S 2.9GHz
Ventrix 552-E1.6	1	6	Intel Core i7-4770S 3.1GHz

Sales: +44 (0) 1273 570 220 Admin: +44 (0) 1273 608 331 Fax: +44 (0) 1273 570 215 Website: www.amplicon.com Email: sales@amplicon.com